


Features

- Available in 28 finishes including 13 PVD finishes
- All brass construction
- 4-3/16" spout center to center
- Single handle operation cartridge with ceramic disk
- Flexible braided hoses for ease of installation
- 1.2 gpm (4.5 L/min) max flow rate

Codes/Standards Applicable


Product meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- NSF/ANSI 61 & NSF/ANSI 372
- CEC / DOE
- Commonwealth of MA
- EPA WaterSense High Efficiency Lavatory
- ADA compliant



<u>D Street</u>

SINGLE HOLE LAVATORY FAUCET

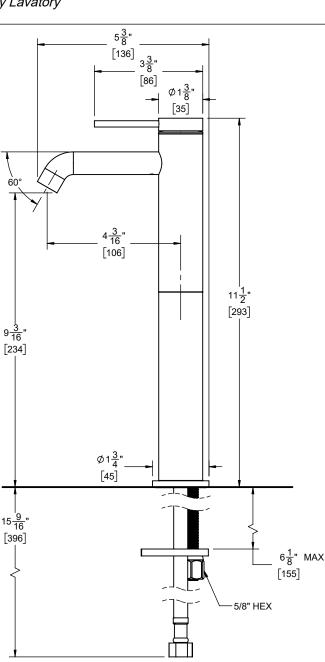



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS SHOWN TO NEAREST 1/16" [DIMENSIONS SHOWN TO NEAREST 1MM]